

**Overview**

The **SpliceGroup™ W4 Enclosure** is a versatile, wall-mounted internal wall box, designed for small to mid- fibre count applications.

This compact, modular enclosure is ideal for use in locations such as building entrances, multi-dwelling units (MDU), demarcation points, and other internal environments where flexibility is key, and space is limited.

The W4 enclosure accommodates incoming and outgoing cables from top left, top right and bottom left, bottom right and accept up to 4 x standard splice cassettes that can pivot down or be removed for ease of splicing and patching.



The hinged splice cassette and removable doors simplify cable installation and patching, making the process more efficient and user-friendly.

With a depth of just 116 mm, this lightweight W4 enclosure can accommodate up to 96 fibres (using SFF connectors)

This adaptable W4 enclosure provides a flexible solution for building networks, facilitating quick and scalable connections to meet current and future demands.

**Main Features**

- Robust and compact design
- Left and right handed options
- Supports SWR and single splicing, patching and passive components
- Accommodates up to 96 fibre using SFF connectors
- Accepts up to 4 x standard splice cassettes
- Flexible fibre management
- Multiple cable entry and exit points for versatile installation options

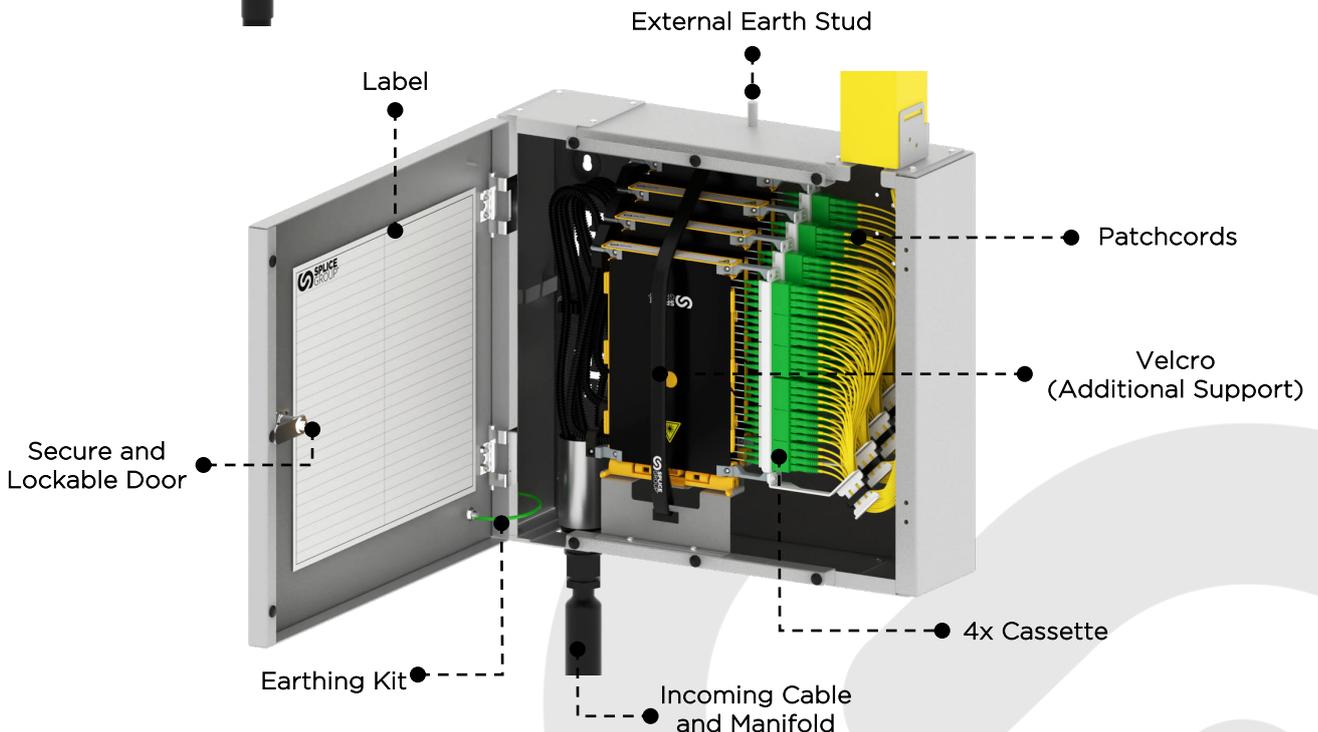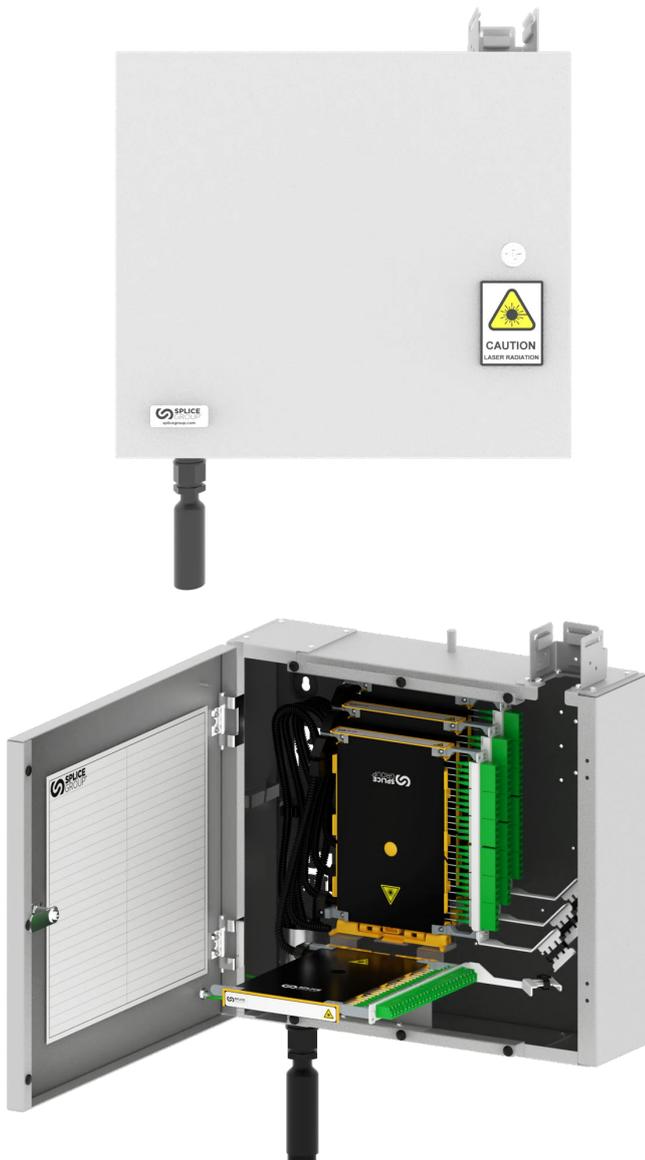

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of SpliceGroup™ is indicative only and shall not be binding on SpliceGroup™ or be treated as constituting a representation on the part of SpliceGroup™. SpliceGroup™ reserves the right to make modifications to this document without prior notice.

## Specifications

### General Specifications

Application	Telecommunications, Data Centre, Co-Location, Enterprise, FTTX, Rail
Product Type	Wall Mounted Enclosure
Cassette Option	Up to 4 x Cassettes with multiple connector options
Manifold Option	Multiple Options
Compatibility	Conventional & Ribbon Cable, F-tube, Blown fibre, Pre-terminated

### Mechanical Characteristics

Dimension (HxWxD)	360mm x 400mm x 116mm (14.17 in x 15.74 in x 4.56 in)
Weight (Approximately)	5.1 kg (11.24 lb) - Enclosure Only

### Material

Frame	Mild Steel
Doors and Panel	Mild Steel

### Colour

Side Doors and Panels	Light Grey (RAL 7035)
-----------------------	-----------------------

### Wall Enclosure Options

Cable Entry & Exit	Top and Bottom
--------------------	----------------